
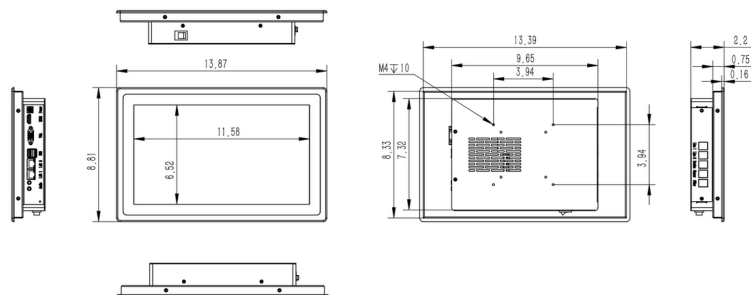


DISPLAY & CONTROL

Screen	13-inch LED Touch Screen - Full HD Resolution (1080p) - Anti-Glare & Scratch-Resistant
Language	Multiple Languages
Centralized Management	- Centralized Real-time Multiple Rooms Management - Secure Local Server with Mobile Access - Inter-room Communication System - Seamless Expansion
Adaptive Integration	- Plug & Play, Fully Compatible with Multiple Vendors' Sensors and Devices - Protocols Supported: Modbus RTU, Modbus TCP/IP, BACnet, ...



Dimension Drawing (inch)

APPLICATIONS

Indoor Cultivation	Fertigation Automation
Greenhouses	Agricultural
Container Growing	OEM & Custom Applications
Facility Automation	And More ...

DIMENSIONS

Outline Dimension (L*W*H)	13.87"×8.81"×2.2" 352.2mm×223.7mm×56mm
Controller Cutout Size (L*W)	13.39"×8.33" 340.2mm×211.7mm
Hardware Materials	Aluminum Alloy
Installation Type	Flush-Mount, Surface-Mount, VESA

VENDORS SUPPORTED

Trolmaster	MBS-PRO	HS-1	LMA-11
	MBS-PAR	DSP-1	LMA-13
	WCS-2	DSP-2	LMA-14
	MBS-SD	DSD-1	LMA-14G
	WD-1	DSV-1	LMA-G
	SPH-1	DSC-1	LMA-T
	TS-1	DSH-1	OAT-24
	TS-2	ARS-1	OA6-24
	TS-3	LMA-9	...
Agrowtek	SXC	SXG	DXV4
	RD8i	VX8i	CX3i
	RX1i	LXD	SDI
	RX4i	AXG	...
	HX8	SXQ	
Aroya	Gateway, Teros 12, Teros One, Climate One ...		
Growlink	Terralink, ...		

OPERATING REQUIREMENTS *

Operating Temperature	14°F - 140°F -10°C - 60°C
Storage Temperature	-4°F - 158°F -20°C - 70°C
Relative Humidity	20% - 90%
Supply Voltage	100-240VAC, 50/60Hz

*Caution: Controller performance may vary based on installation conditions and environmental exposure. Using the controller outside specified environmental limits may adversely affect functionality.